



SECURINESS

Sentryhound

 Kontakt os venligst for mere information

Cell Phone Detection Security Portal

DETECTS ANY CELL PHONE ON OR OFF

SentryHound excels where common metal detectors fail by reducing false triggers using highly sensitive sensors. This gives it the ability to detect phones in pockets, purses and even body cavities for the most comprehensive TSCM.

MULTI-ZONE LED ALERTS & SIRENS

SentryHound contains 12 ultra-sensitive and independent cell phone detection zones lighting up according to location on body/distance from detected phone as well as audible siren with adjustable volume.

ENFORCE YOUR NO CELL PHONE POLICY


SentryHound is perfect for any security team or venue with a NO CELL PHONE POLICY in place. Setup & operation is quick and simple in a variety of spaces including government & military SCIFs, educational, corporate & correctional facilities. SentryHound also avoids invasive and time consuming searches in public spaces such as court rooms, concert halls & theaters.

SECURING YOUR FACILITY

SentryHound detects ferromagnetic materials. This includes all cell phones but also many knives & guns too with sensitivity rivaling expensive and complex metal detection systems.

RUGGED PRESSURE TRIGGER MAT

SentryHound includes a pressure switch ensuring that only suspects passing through its sensors will be instantly scanned.

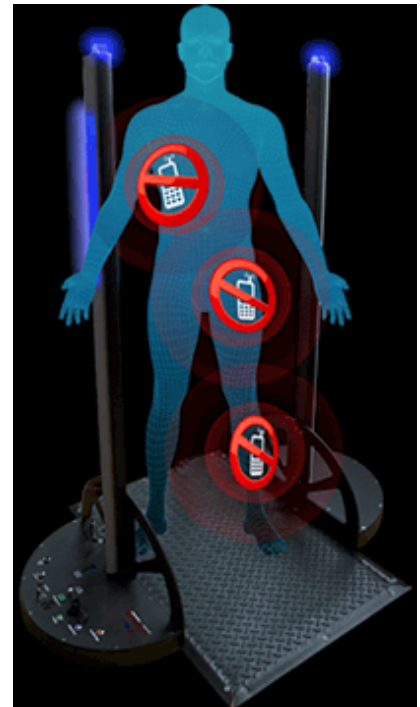

Solution specifications

SENSORS	(12) Independent detection zones (6 per pole)
PRESSURE MAT	Heavy duty diamond plate vinyl surface switch activates at 15 lbs
HORIZONTAL RANGE	76 (user adjustable) cm (between poles)
VERTICAL RANGE	190 cm (head to toe)
POSSIBLE FALSE TRIGGERS	Some metallic objects, surfaces & strong nearby electromagnetic activity

WEIGHT	22.7 kg assembled
DIMENSIONS	190 cm (H) x 76 cm (L) x 61 cm (W)
ALERTS	High intensity blinking/fading color LEDs (multi-zone) Integrated siren with adjustable volume Dry trigger contacts for remote camera, DVR, etc. alerts
CONTROLS	ON/OFF security key switch Manual push buttons for calibration & sensitivity adjustment
SENSITIVITY	10 levels (user selectable)
CALIBRATION MODE	Auto or manual (calibration approximately 5 seconds)
WARM UP TIME	Approximately 10 minutes
POWER	110VAC for continuous operation Internal rechargeable battery with fast charger (10 hours of continuous use)
OPERATING TEMP	-10° to 65° C
INCLUDES	Sensor poles (2), adjustable base units, base sync cable, rugged pressure switch mat, power cable / charging adapter



SECURINESS Sentryhound

Kontakt os venligst for pris

Alle priser er eksklusive moms, levering og installation